
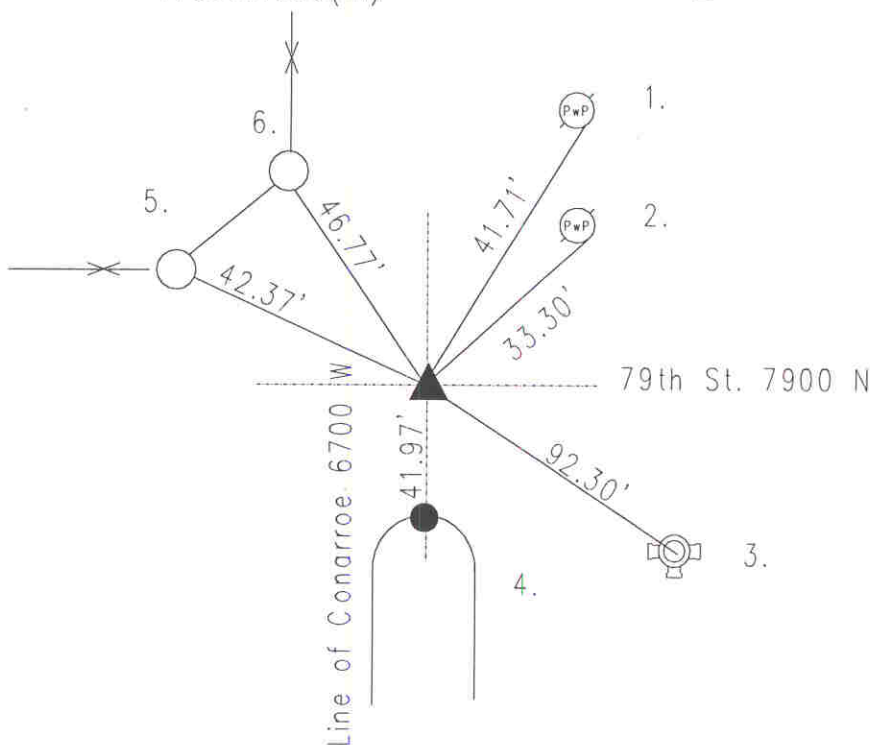


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 26 TOWNSHIP 17 RANGE 2
DATE: 4-11-02
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 4-7-97

IN. S.P.C. E ZONE NAD '83
NAME: 17022601
N: 516131.1990(m)
E: 47653.0950(m)

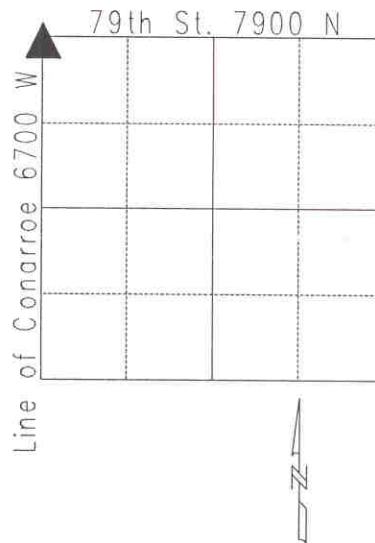

Original post set 1821 by Laughlin with witnesses: 12" beech N 27 W 22 links; 8" sugar maple S 28 E 32 links per Marion County Atlas pg. 4. There is no reference to this corner in the Pike Township Legal Survey Book. 10-29-48 called old stake and iron pin were replaced by stone 6" down. 9-5-61 called railroad spike over stone. 8-22-73 called PK nail at surface. This corner excavated 7-24-87 stone found 12" down with 2" lead pipe beside it. Harrison set. Re-tied 4-7-97 by Wilcoxon. Re-tied 4-11-02 by Wilcoxon.
17022601

REF.	DISTANCE	DESCRIPTION
1.	41.71'	PK nail SE PwP#19-233 30"up
2.	33.30'	Mag nail SE PwP#11-233 12"up
3.	92.30'	Top nut of fire hydrant
4.	41.97'	Due S to N-edge of concrete median in asphalt
5.	42.37'	Face of steel fence post
6.	46.77'	Face of steel fence post